oerlikon schlafhorst

Speed frame tubes with piecing aid at top

for Zinser 670 RoWeMat

WN 425 53-1E

Modification
In relation to the release 09/10 the following modifications were made:
Expansion of the specification for the roving catch.

Earlier releases
08/99; 10/00; 02/03; 11/04; 02/05; 09/10

1. Design

Plastic (ABS) roving frame tubes for roving frames with flyers open at the bottom.
Colour of the piecing aid: black

Measurements not indicated can be selected at will.
Admissible deviations to be agreed upon between user and manufacturer.

Number of driver slots: 16

Roving catch:
- Densely woven velour band for placing the roving on the surface.
- Securing the velour band:
  Smoothing effect when turning the tube clockwise.

2. Application

Doffing with piecing aid, for automatization.

Dimensions in mm

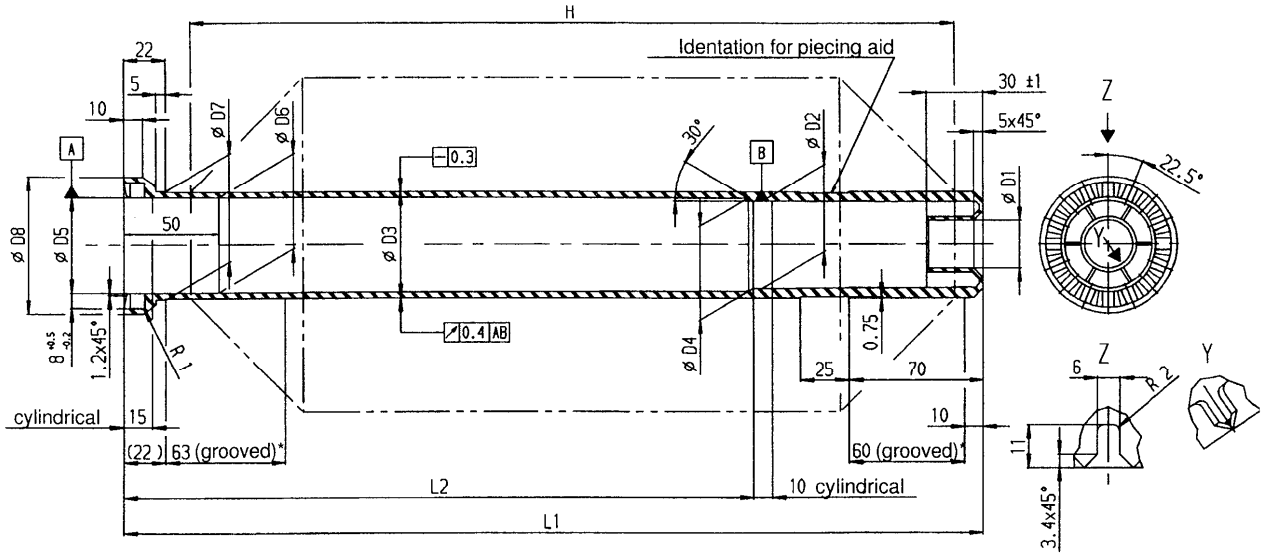

* Grooving must lie within tolerance range D3.

H	L 1 ±1	L 2 ± 1	D 1 ± 0,1	D 2 ± 0,1	D 3 ± 0,3	D 4 min	D 5 ± 0,2	D 6 ± 0,2	D 7 +0,3	D 8 + 1
400	450	330	25,2	46,2	56	49	50,3	50,3	57	72

Copyright reserved according to DIN 34